

Specification/Data sheet


UltraVent XS 6 2/3 E



Article number: 60.73.xxx

Variants

- 60.73.865: UltraVent XS 6 2/3 E
- 60.73.945 Combi-Duo adapter kit UltraVent XS 6 2/3 E
- 60.73.943: UltraVent XS 6 2/3 E + Combi-Duo adapter kit UltraVent XS 6 2/3 E

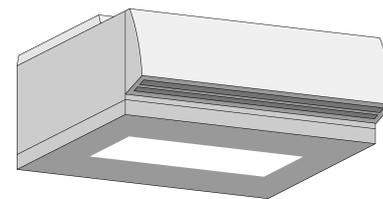

Description

The UltraVent XS gets rid of the steam emitted with its condensation technology. No connection to the outside or extension of an existing exhaust system is necessary with this air recirculation hood. Installation is simple, and the hood can be retrofitted at any time.

Features

- Reliably binds escaping steam and vapours thanks to the high extraction rate
- Easy-to-clean grease filter (CNS), dishwasher safe
- Proximity door contact switch
- Automatically boosts extraction rate when cooking cabinet door is opened

Technical Specifications

- Connection: 230V 1 NAC 50/60 Hz
- Connected load: 155-225 W
- Air extraction rate: 280-560 m³/h
- Operating noise level 1: 41 dBA
- Operating noise level 2: 57 dBA
- Width: 657 mm
- Height: 240 mm
- Depth: 580 mm
- Weight: 25.5 kg
- Certifications: VDE (IEC) EN 60335-2-99, NSF, RCM, EMC

Material

- Rust-free stainless steel (CNS 1.4301)

Note

- The local standards and regulations for ventilation systems must be adhered to
- The UltraVent XS condensation hood can be used for right-sided units as well as for left-sided units. An installation option for both variants is included in the scope of delivery.

